

# Dynatex<sup>®</sup>




Manufactured under Patent  
No. 10106309

## GENIUS GUN REPAIR FOAM

**DYNATEX REPAIR FOAM** is a top of the line, one-component, moisture curing PU foam. This low pressure formulation makes it ideal for sound and thermal insulation, sealing and filling all types of joints, gaps and cavities.

**DYNATEX REPAIR FOAM** is ideal for restricting air, sound, dirt and water vapor in a wide variety of applications such as: Inside refrigerated trailers to bond fiberglass liners to prepared spray foam insulation and aluminum posts, grain drying bins, barns, coops, and cut-out buildings, filling joints, and insulating wall panels.

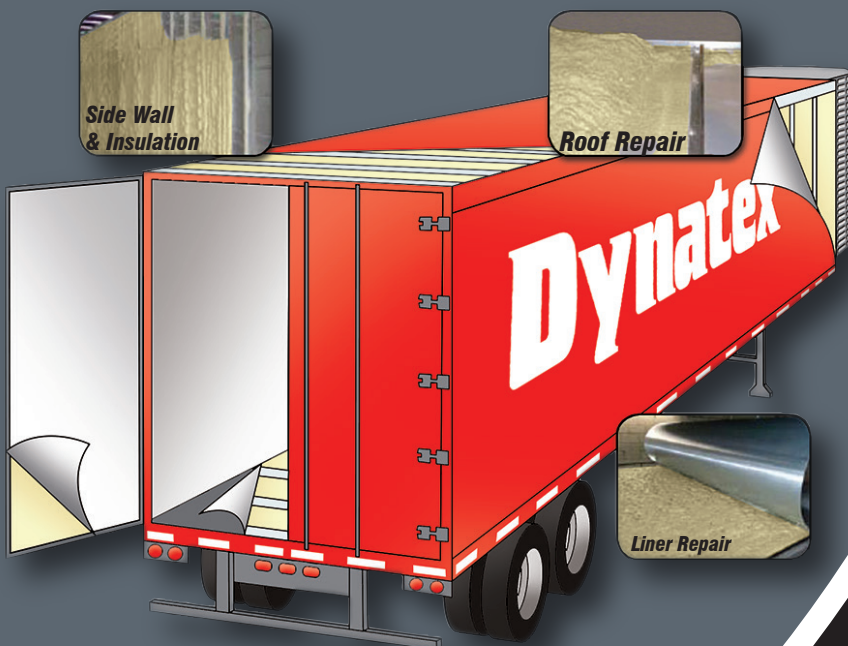

• **Reusable Up to Six Weeks**

• **No Mixing or Calibrating**

• **Ideal for Small Gap Fills**

• **More Cost Effective Per Job Than Canisters**

# GENIUS GUN REPAIR FOAM

## MINIMAL EXPANDING POLYURETHANE FOAM

### TYPICAL PROPERTIES

Density .....	1.56 lbs./ft. <sup>3</sup>
Thermal Conductivity .....	0.22 - 0.26 Btu- in/hr-F-ft <sup>2</sup>
R Value .....	3.8-4.8 per inch
Tack Free (1" bead) .....	8 minutes (68° F & 65% RH)
Fully Cured (1" bead) .....	12 hours (68° F & 65% RH)
Cuttable (1" bead) .....	1 hour (68° F & 65% RH)
Tensile Strength .....	15 psi
Shear Strength .....	7 psi
Elongation .....	20%
Yield/24 oz. can .....	6.6 gallons freely foamed
Theoretical Yield-20 oz. 1/4" bead .....	2279 ft.
20 oz. 1/2" bead .....	577 ft.
VOC .....	175 grams/liter

Service Temperature: -40° F to 200° F

Application Temperature: -35° F to 140° F

\*\*Information on this sheet is subject to change without notice, and should not be used for writing specifications. For additional information, contact Dynatex.



STICK TOGETHER.

RepairFoams/053019



MADE IN U.S.A.  
HECHO EN E.U.A.

350 Ring Road  
Elizabethtown, KY 42701, USA  
270-769-5557 • 800-999-2937  
FAX: 270-769-6418  
www.dynatexinc.com