

SOUDAFLEX PU35

Revision: 04/14/23

Page 1 of 2

Technical Data:

| | |
|-------------------------------------|-----------------|
| Base | Polyurethane |
| Consistency | Stable paste |
| Curing system | Moisture curing |
| Skin formation* (68°F / 65% R.H.) | 50-60 min |
| Curing speed * (68°F / 65% R.H.) | Ca. 2 mm/24h |
| Hardness | 30 ± 5 Shore A |
| Density | 1.25 g/ml |
| Elastic recovery (ISO 7389) | > 80 % |
| Maximum allowed distortion | ± 50 % |
| Max. tension (DIN 53504) | 165 psi |
| Elasticity modulus 100% (DIN 53504) | 85 psi |
| Elongation at break (DIN 53504) | > 800 % |
| Temperature resistance | -22°F to 194°F |
| Application temperature | 41°F to 86°F |

(*) these values may vary depending on environmental factors such as temperature, moisture, and type of substrates. Test results are averages obtained under laboratory conditions. Reasonable variations can be expected.

Product description

Soudaflex PU35 is a high quality, elastic, 1-component sealant based on polyurethane.

Properties

- 50% movement
- Very easy to apply
- Good weather resistance
- Permanently elastic after curing
- Very good adhesion on many materials
- No bubble formation within sealant (in high temperature and humidity applications)
- Can be painted with most types of paint systems

Applications

- All usual building joints with high movement.
- Connection joints between window frames, doorframes and walls.
- Expansion joints between many different construction materials.
- Joints with large movement.
- Sealing of shrinking joints in concrete floors
- Sealing of floor joints

Packaging

Color: White, Concrete Gray


Packaging: 10.1 fl.oz. aluminum cartridge

Shelf life

15 months in unopened packaging in a cool and dry storage place at temperatures between 41°F and 77°F.

Approvals / Standards:

ASTM 920 Type S. Grade NS. Class 50. Use T, NT, M, A, G, and O.
 Federal Specification TT-S-00230C Type II Class A
 ASTM C1247 10 Weeks

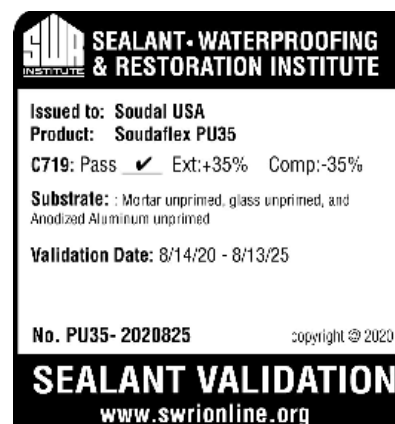

Remark: This information and all further technical advice are based on SOUDAL present knowledge and experience. However, SOUDAL assumes no liability for providing such information and advice including the extent to which such information and advice may relate to existing third party intellectual property rights, especially patent rights. In particular, SOUDAL disclaims all WARRANTIES EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY. SOUDAL SHALL NOT BE RESPONSIBLE FOR CONSEQUENTIAL, INDIRECT OR INCIDENTAL DAMAGES (INCLUDING LOSS OF PROFITS) OF ANY KIND. SOUDAL reserves the right to make any changes according to technological progress or further developments.

SOUDAFLEX PU35

Revision: 04/14/23

Page 2 of 2

Substrates

Substrates: all usual building substrates, brick, concrete, metals, ...

Nature: clean, dry, free of dust and grease.

Surface preparation: Soudaflex PU35 has good adhesion to most substrates. In critical situations or to obtain optimum adhesion, use Primer 100 on porous surfaces. Always use Primer 100 on natural stone, no primer on non-porous substrates.

No adhesion on glass, PE, PP and PTFE (Teflon). Soudal recommends a preliminary adhesion test on every surface.

Joint dimensions

Min. width for joints: 3/16"

Max. width for joints: 1 3/16"

Min. depth for joints: 3/16"

Recommendation sealing jobs: joint width = 2 x joint depth.

Application method

Application method: With manual- or pneumatic caulking gun.

Cleaning: Clean with White Spirit or Soudal Surface Cleaner immediately after use (before curing).

Finishing: With a soapy solution or Soudal Finishing Solution before skinning.

Repair: With the same material

Health and Safety Recommendations

Take the usual labor hygiene into account. Consult the packaging label for more information.

Remarks

- When painted with oxidative drying paints disturbances in the drying of the paint may occur (we recommend doing a compatibility test before application).
- Soudaflex PU35 has a good UV resistance but can discolor under extreme conditions or after very long UV exposure.
- It is recommended to do a compatibility test prior to application.
- Contact with bitumen, tar or other plasticizer releasing materials such as EPDM, neoprene, butyl, etc. is to be avoided since it can give rise to discoloration and loss of adhesion.
- Do not apply or cure in the presence of uncured silicone sealants, alcohol or other solvent cleaners.
- When using different reactive joint sealants, the first joint sealant must be completely hardened before the next one is applied.

Environmental clauses

Leed regulation:

Soudaflex PU35 conforms to the requirements of LEED.

Low –Emitting Materials: Adhesives and Sealants.

SCAQMD rule 1168. Complies with USGBC LEED® 2009 Credit 4.1: Low-Emitting Materials – Adhesives & Sealants concerning the VOC-content.

Specifications

ASTM C920 Class 50

TT-S-00230C

CAN/CGSB 19.13-M87

Limited Warranty:

SODAL warrants product to be of good quality and will replace or, at our election, refund the purchase price of any products proved to be defective. Satisfactory results depend not only upon quality products, but also upon many factors beyond our control. Therefore, except for such replacement or refund, SODAL MAKES NO WARRANTY OR GUARANTEE, EXPRESSED OR IMPLIED, INCLUDING WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY, RESPECTING ITS PRODUCTS, and SODAL shall have no other liability with respect thereto. Any claim regarding product defect must be received in writing one (1) year from the date of shipment. No claim will be considered without such written notice or after the specified time interval. User shall determine the suitability of the products for the intended use and assume all risks and liability in connection therewith.

Remark: This information and all further technical advice are based on SODAL present knowledge and experience. However, SODAL assumes no liability for providing such information and advice including the extent to which such information and advice may relate to existing third party intellectual property rights, especially patent rights. In particular, SODAL disclaims all WARRANTIES EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY. SODAL SHALL NOT BE RESPONSIBLE FOR CONSEQUENTIAL, INDIRECT OR INCIDENTAL DAMAGES (INCLUDING LOSS OF PROFITS) OF ANY KIND. SODAL reserves the right to make any changes according to technological progress or further developments.