

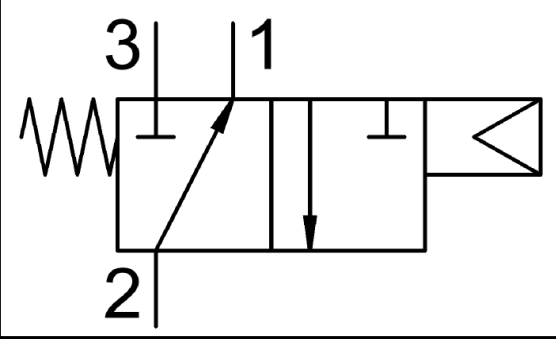


NOTES:
1. APPLICABLE STANDARDS/SPECIFICATIONS:
ASME Y14.5M-1994, DIMENSIONING AND TOLERANCING
ASME Y14.38-1999, ABBREVIATIONS
2. COMPONENT OR ITEM TO BE COMPLIANT WITH THE MOST
CURRENT REVISION OF THE RoHS / Wee DIRECTIVE FOR
THE REDUCTION OF HAZARDOUS SUBSTANCES AND MATERIALS.
ALL DIMENSIONS ARE FOR REFERENCE ONLY.
3.
4. TABLE PRINT: USE BOM ASSOCIATED WITH AIRMAN ASSEMBLY
PART NUMBER. SUFFIXES (EXAMPLES -CLR AND -BLK) ATTACHED
TO THE END OF THE AIRMAN PART NUMBER WILL INDICATE THE
COLUMN TO USE, NO SUFFIX USE THE QTY COLUMN.
5. ITEM INDIVIDUALLY SEALED IN BAG.

REV	DATE	EC #	ZONE	DESCRIPTION	DRAWN	CKD
A	2020-01-23			ORIGINATED	NR	CED

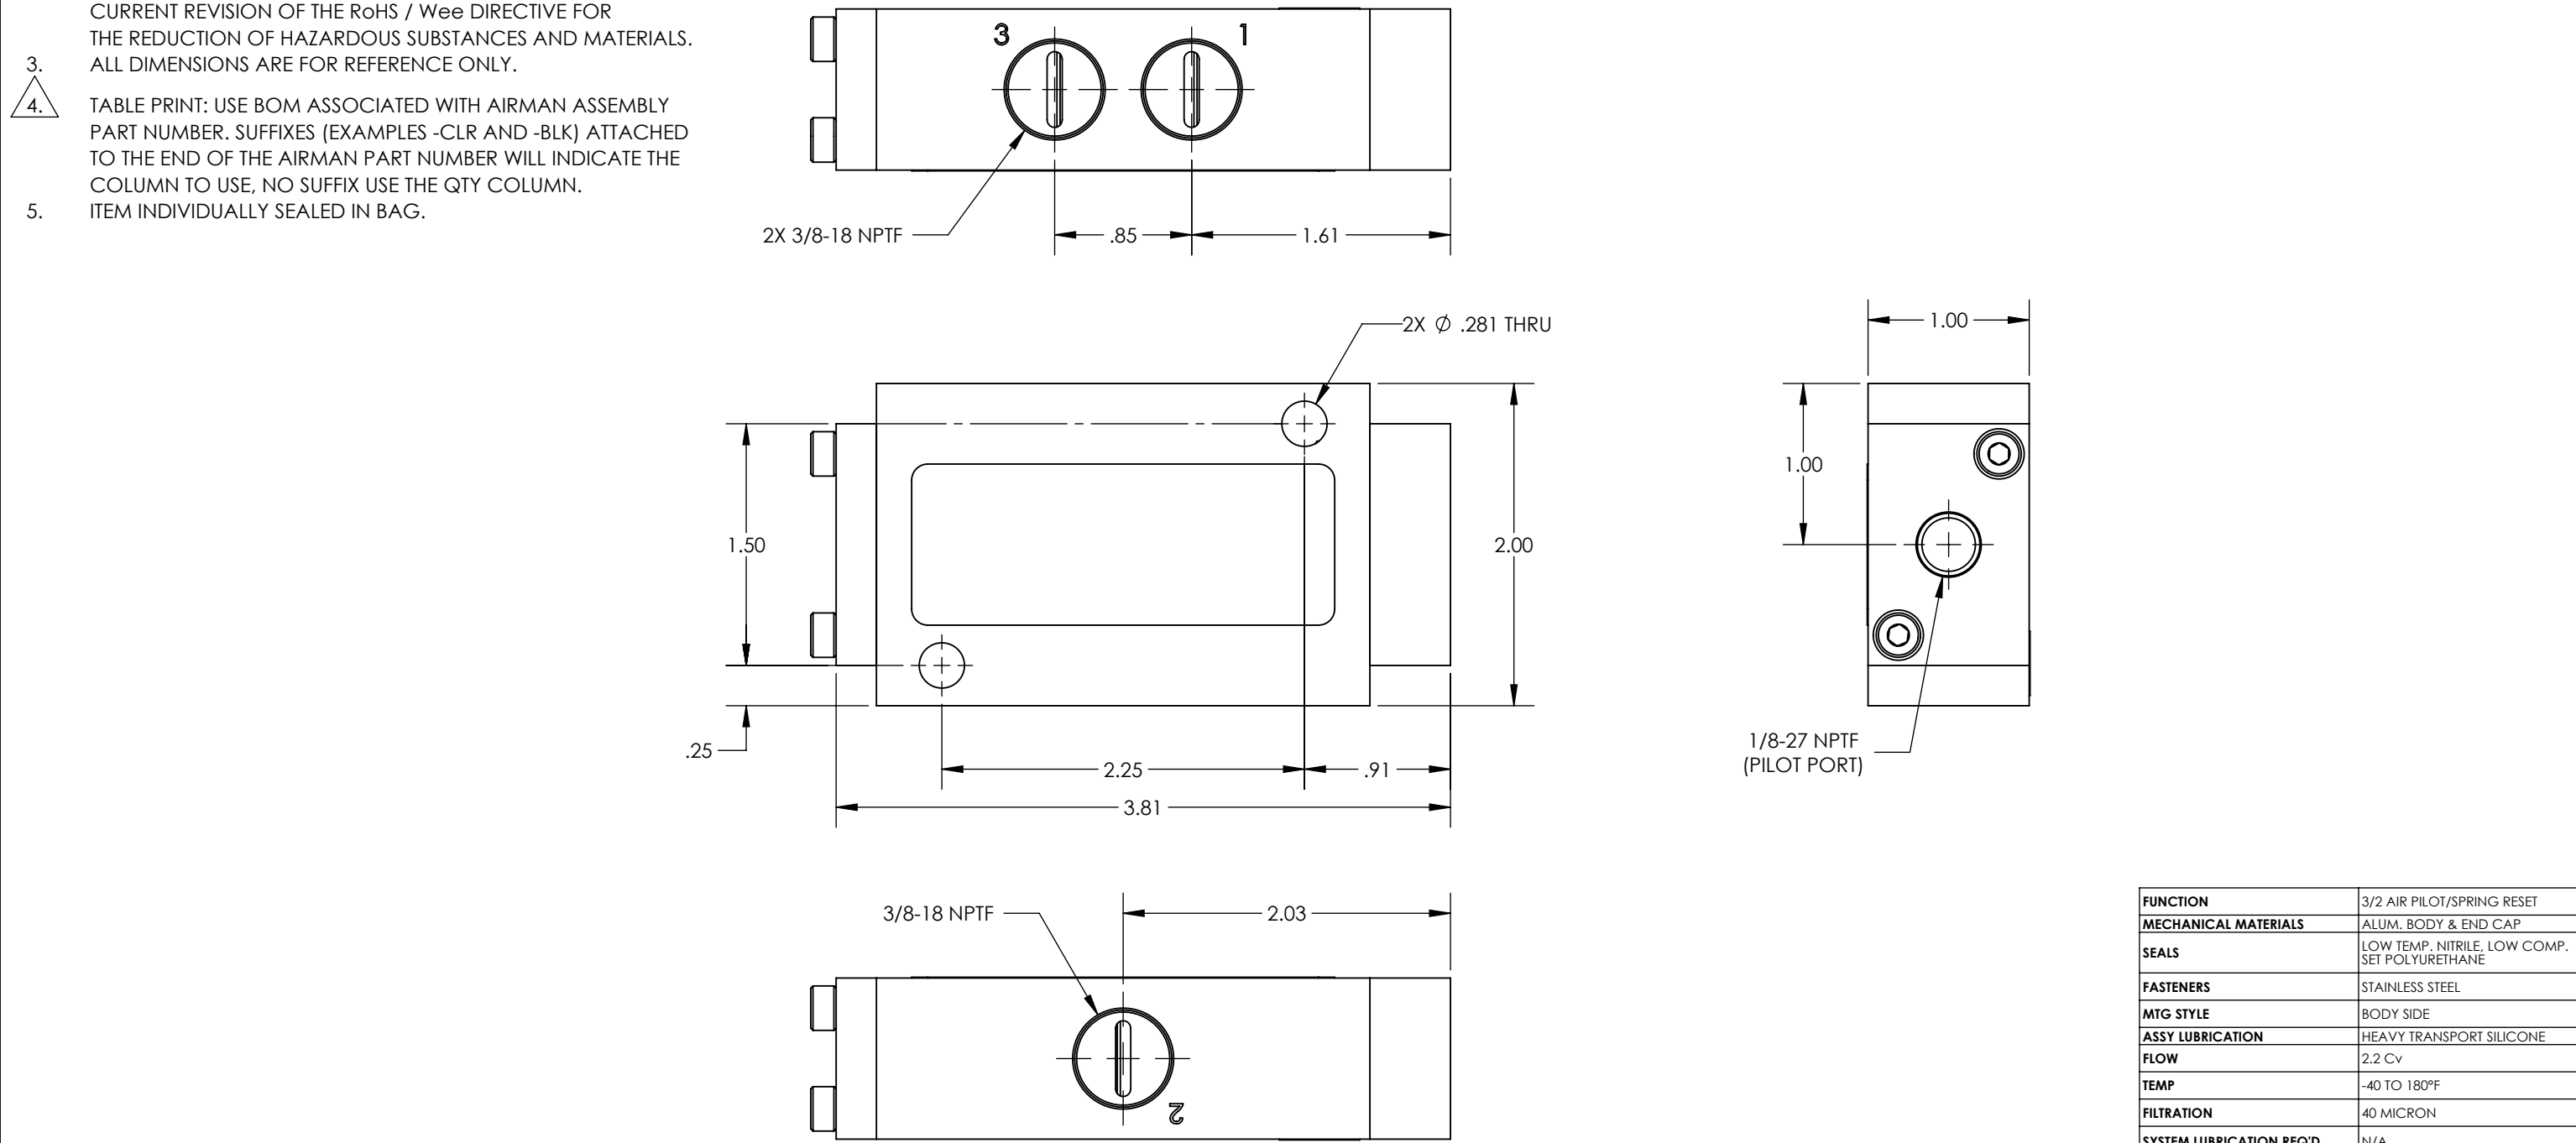



2

4

AIRman PART NUMBER CHART	
AIRman PART NUMBER	ANODIZATION COLOR
V381030521	NON-ANODIZED
V381030521-BLK	BLACK-ANODIZED
V381030521-CLR	CLEAR-ANODIZED

NOTE: PART MUST BE CLEAN AND BURR FREE
MFG TOLERANCES UNLESS OTHERWISE NOTED:
ALL UNITS ARE INCHES
(2) DECIMAL PLACES: ±.01
(3) DECIMAL PLACES: ±.005
ANGLES: ±.5°
BREAK ALL EDGES .005/.015 X 45°
MACHINED SURFACES TO BE 63 RMS
CRITICAL CHARACTERISTIC - CONTROL
PLAN REQUIRED

Third Angle
Projection



CONFIDENTIAL: THIS DRAWING OR
ANY PART THEREOF IS PROPRIETARY
AND MAY NOT BE REPRODUCED OR
COPIED WITHOUT WRITTEN CONSENT
OF AIRMAN PRODUCTS

DRAWN BY	NR	DESCRIPTION
DRAWN DATE	2020-01-23	VALVE, .38 NPT, 3-2, AP-SR
DRAWING SIZE	B	
MATERIAL	SEE NOTES	PART NUMBER
SCALE	1:1	V381030521
SHEET #	1 OF 1	